


Project	Item Number	Quantity
---------	-------------	----------

SRM12/NPH12		<p>MADE IN THE USA SRM12/NPH12</p> <h2 style="text-align: center;">12 Quart Countertop Mixers</h2> <p>Models:</p> <ul style="list-style-type: none"> <input type="checkbox"/> SRM12 – 20 qt. Countertop Mixer <input type="checkbox"/> NPH12 – 20 qt. Countertop Mixer Without PTO Hub <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"></div> <div style="text-align: center;"></div> <div style="text-align: center;"></div> </div>
12 QT. COUNTERTOP MIXERS	<p>Features</p> <ul style="list-style-type: none"> • 1/3 HP Capacitor Start Motor • Variable Speed Drive: Four fixed speeds or any speed in-between • Change speeds without having to stop the mixer • Two-piece, stainless steel, dishwasher safe safety guard • Heavy-duty stainless steel bowl • #12 Power Take-Off (PTO) hub on SRM12 • Interlock switches protect operator from injury if safety guard is open or bowl is lowered 	<p>Standard Accessories</p> <ul style="list-style-type: none"> • 12 quart stainless steel bowl • Batter beater • Wire whip • Ingredient chute <p>Optional Accessories</p> <ul style="list-style-type: none"> <input type="checkbox"/> 12 quart dough hook <input type="checkbox"/> 15 minute timer <input type="checkbox"/> VS9 vegetable slicer attachment <input type="checkbox"/> VS9H grater/shredder attachment <input type="checkbox"/> ALMFC12 meat & food grinder <input type="checkbox"/> 12 quart pastry knife
Univex Corporation	<ul style="list-style-type: none"> • Low voltage protection prevents accidental start-up after power failure • Hardened alloy gears in transmission • Durable NSF approved hybrid epoxy / polyester powder coat finish • Cord and plug 	<p>Warranty</p> <ul style="list-style-type: none"> • Two-year, on-site parts & labor warranty
<p>WARRANTY DETAILS</p> <p>The SRM12 mixer carries a two-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins date of purchase and provided the unit is used in accordance with our instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. local time, Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential, compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.</p>		

12 Quart Countertop Mixers

SRM12/NPH12

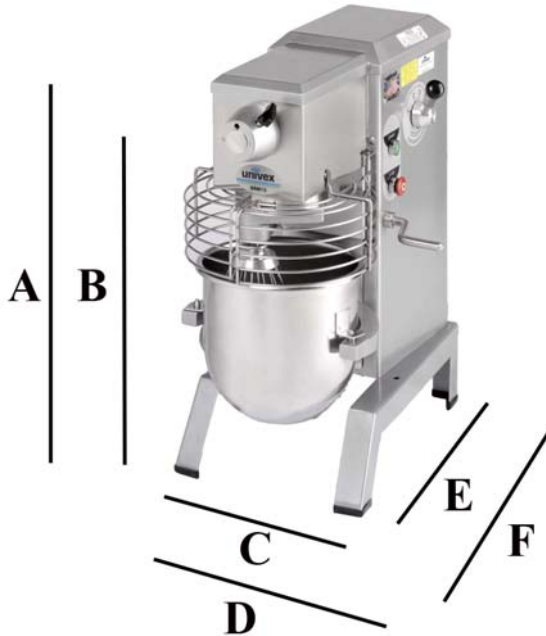

Dimensions

A) Overall height	28 1/4" (717mm)
B) Base to PTO height	25" (635mm)
C) Machine width	13 3/4" (349mm)
D) Overall width with handle	17 11/16" (448mm)
E) Depth (leg to leg)	20" (508mm)
F) Overall depth	25 3/8" (644mm)

Shipping Information

Freight Class:	85
Net Weight:	146 lb. (66 kg)
Shipping Weight:	190 lb. (87 kg)
Shipping Box Dimensions:	
Height:	34" (864mm)
Width:	30 1/2" (775mm)
Depth:	20 1/2" (521mm)

Cartons are affixed to a pallet. The pallets are heat-treated and NELMA approved for international shipping. The weight and dimensions of the pallet are included in the weight and dimensions above.

Capacity: 15 Quarts (14.2 liters)

Motor: 1/3 hp. Capacitor start

Electrical: 115/60/1, 6.2 amps, NEMA plug 5-15P. Also available at an extra cost 208-240/60/1, 220-240/50/1, 230/50/1 (CE), 208-240/60/3, 380/50/3, 400/50/3 (CE), 440-480/60/3.

Controls: Momentary contact STOP & START buttons and contactor.

Transmission: Univex variable speed transmission with hardened alloy gearing and torque sensing pulleys.

Lubrication: Food grade grease

Finish: NSF approved hybrid epoxy / polyester powder coat

Bowl: Die-drawn stainless steel

Bowl Guard: Heavy-duty, two-piece, stainless steel SwingRing™ safety guards. Swing open for full access to bowl. Removes easily for cleaning, fits in dishwasher. Guard must be attached and closed for mixer to operate. Bowl support interlock provides additional protection.

Speeds: The variable speed transmission not only provides the standard 4 locked-in speeds, but also any-in-between speeds

Speed (RPM)	1	2	3	4
Beater Shaft	125	180	240	300
PTO	145	200	270	345

Bowl Lift: Ergonomic hand operated crank, self-locking in top and bottom position.

PTO Hub: Model SRM12 comes with a front-mounted industry standard #12 Power Take-Off (PTO) hub for use with Univex #12 attachments.

Optional Attachments

The following are available at an extra cost:

- 15 Minute Timer
- 12qt (15 qt capacity) stainless steel bowl
- 12qt Aluminum Batter Beater
- 12qt Aluminum Dough Hook
- 12qt Wire Whip
- 12qt Pastry Knife
- 12qt Four-Wing whip

Optional Accessories:

The following are available at an extra cost:

1000454 Mixer Cover: Heavy-duty clear plastic cover for SRM12

1700800 S-3A Stand: Stainless steel mixer stand with undershelf and locking casters.

1000950 VS9 Vegetable Slicer: 9" vegetable slicer attachment with adjustable knife assembly for use on a #12 PTO hub.

1001050 VS9H Grater / Shredder Attachment: 9" vegetable / cheese shredder attachment with plate holder and 3/16" plate for use on a #12 PTO hub.

1000550 ALMF12 Meat & Food Grinder: Includes cylinder, ring, worm, stainless steel pan, plunger, 3/16" plate and "x" knife. Fits #12 PTO hub.